

MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	26-MAY-03
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 5 : 2		



 PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
	APPROVED BY	<i>Kuan</i>	<i>Chen</i>	<i>Chen</i>
	DATE	26 May 03	26 May 03	26 May 03
	DRAWN BY : J.L.YANG	UNIT IN mm	OUR REF. 00	
S5039		CLOVER DISPLAY LIMITED		

TN TYPE

MODEL NO.	S5039A	S5039B	S5039C	S5039D	S5039E	S5039F	S5039G	S5039H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-30°C ~ 80°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN
DISPLAY TYPE	POSITIVE / NEGATIVE REFLECTIVE / TRANFLECTIVE / TRANSMISSIVE							

OPERATION VOLTAGE	3.0 V
DRIVING METHOD	STATIC

PIN	COM	PIN	COM	PIN	COM
1	COM	15	3C	29	2B
2	Y	16	DP3	30	2A
3	1BC	17	4E	31	2F
4	/	18	4D	32	2G
5	/	19	4C	33	/
6	/	20	4B	34	/
7	/	21	4A	35	/
8	DP1	22	4F	36	/
9	2E	23	4G	37	/
10	2D	24	3B	38	←
11	2C	25	3A	39	X
12	DP2	26	3F	40	COM
13	3E	27	3G		
14	3D	28	COL.		

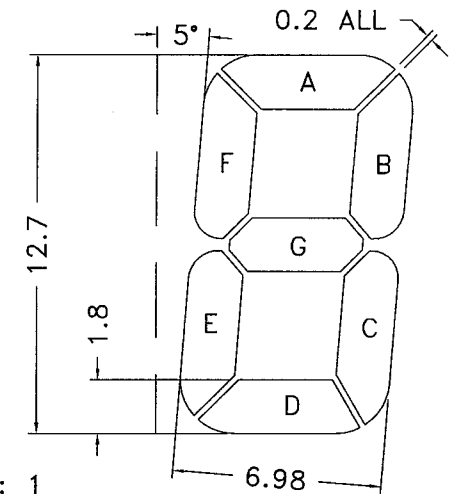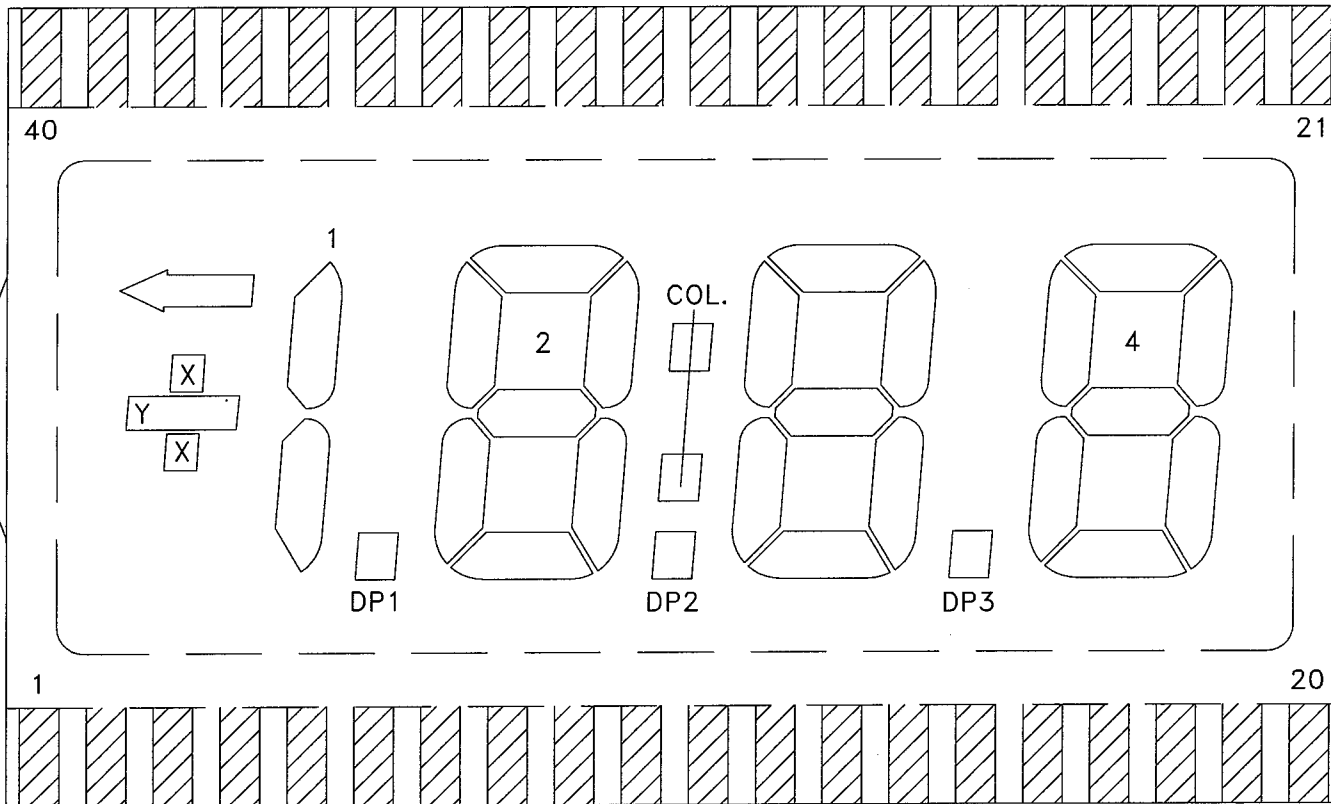

SCALE 4 : 1

REV.	REVISION RECORD	DATE	STANDARD	 PROJECTION S5039	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	26-MAY-03	CUSTOMER REF.		APPROVED BY	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
			SHEET 2 OF 2	DATE	26 May 03	26 May 03	26 May 03	OUR REF. 00
			SCALE 7 : 2	DRAWN BY : J.L.YANG	UNIT IN mm			
					☒ CLOVER DISPLAY LIMITED			