




MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	14-NOV-08
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 2 : 1		

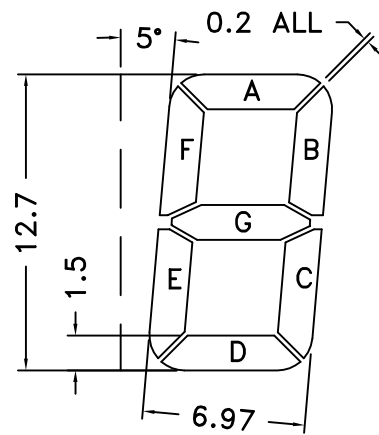

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY	Y.WEN		
DATE	14Nov,08		
DRAWN BY :	M.F.YU	UNIT IN mm	OUR REF. 00
✠ CLOVER DISPLAY LIMITED			

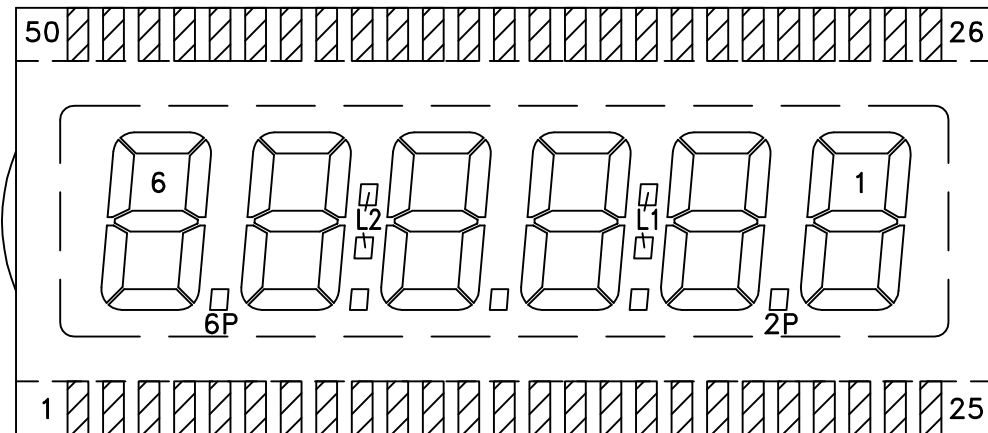

SCALE 3 : 1

PIN	COM	PIN	COM	PIN	COM
1	COM	18	2E	35	3A
2	6E	19	2D	36	3F
3	6D	20	2C	37	3G
4	6C	21	2P	38	4B
5	6P	22	1E	39	4A
6	5E	23	1D	40	4F
7	5D	24	1C	41	4G
8	5C	25	1B	42	L2
9	5P	26	1A	43	5B
10	4E	27	1F	44	5A
11	4D	28	1G	45	5F
12	4C	29	2B	46	5G
13	4P	30	2A	47	6B
14	3E	31	2F	48	6A
15	3D	32	2G	49	6F
16	3C	33	L1	50	6G
17	3P	34	3B		

TN TYPE

MODEL NO.	S5042A	S5042B	S5042C	S5042D	S5042E	S5042F	S5042G	S5042H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE: 0°C ~ 50°C STORAGE: -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C	0°C ~ 50°C -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C	0°C ~ 50°C -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C	0°C ~ 50°C -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN

DISPLAY TYPE	POSITIVE / NEGATIVE REFLECTIVE / TRANFLECTIVE / TRANSMISSIVE
OPERATION VOLTAGE	3.0 V
DRIVING METHOD	STATIC

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING	
00	1st ISSUE	14-NOV-08	CUSTOMER REF.	APPROVED BY	Y.WEN			
				DATE	14Nov,08			
			SHEET 2 OF 2	DRAWN BY :	M.F.YU	UNIT IN mm	OUR REF. 00	
			SCALE N.T.S	 PROJECTION S5042				CLOVER DISPLAY LIMITED