
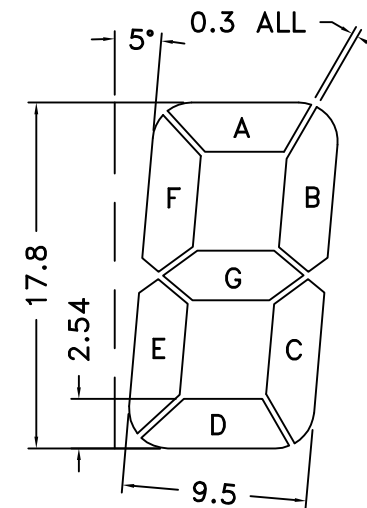


MECHANICAL TOL. ± 0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	12-AUG-09
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE N.T.S		

 PROJECTION S5044	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
	APPROVED BY	Y.WEN		
	DATE	12Aug,09		
	DRAWN BY : ZH.Q.LI		UNIT IN mm	OUR REF. 00
CLOVER DISPLAY LIMITED				

PIN	COM	PIN	COM
1	COM	26	5A
2	/	27	5F
3	/	28	5G
4	/	29	4B
5	/	30	4A
6	1E	31	4F
7	1D	32	4G
8	1C	33	COL.
9	DP1	34	3B
10	2E	35	3A
11	2D	36	3F
12	2C	37	3G
13	DP2	38	2B
14	3E	39	2A
15	3D	40	2F
16	3C	41	2G
17	DP3	42	/
18	4E	43	1B
19	4D	44	1A
20	4C	45	1F
21	DP4	46	1G
22	5E	47	/
23	5D	48	/
24	5C	49	/
25	5B	50	/

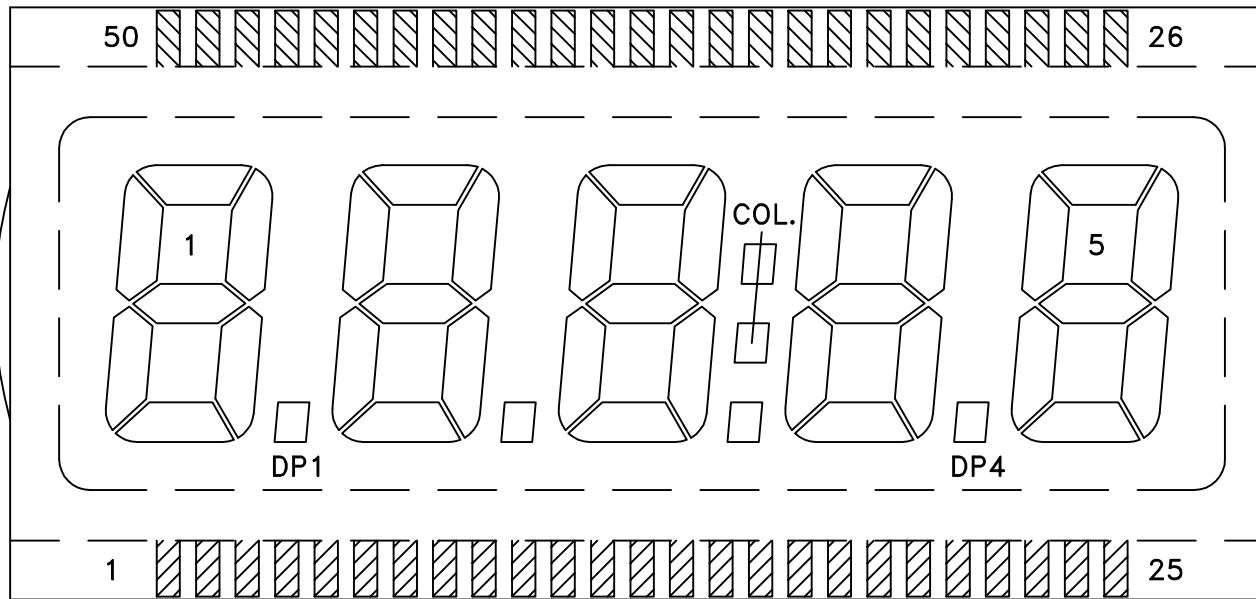

SCALE 5 : 2

TN TYPE

MODEL NO.	S5044A	S5044B	S5044C	S5044D	S5044E	S5044F	S5044G	S5044H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN

DISPLAY TYPE	POSITIVE / NEGATIVE
	REFLECTIVE / TRANFLECTIVE / TRANSMISSIVE
OPERATION VOLTAGE	3.0 V
DRIVING METHOD	STATIC

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	12-AUG-09	CUSTOMER REF.	APPROVED BY	Y.WEN		
				DATE	12Aug,09		
			SHEET 2 OF 2	DRAWN BY :	ZH.Q.LI	UNIT IN mm	OUR REF. 00
			SCALE 2 : 1	 PROJECTION			
				 S5044 CLOVER DISPLAY LIMITED			