



MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	11-APR-16
APPROVED BY	<i>[Signature]</i>	SHEET 1 OF 3		
DATE	11 Apr 16	SCALE 5 : 2		

 PROJECTION S5066	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
	APPROVED BY	Y.WEN	<i>[Signature]</i>	<i>[Signature]</i>
	DATE	11 Apr, 16	11 Apr 16	11 Apr 2016
	DRAWN BY : X.ZH.LIU		UNIT IN mm	OUR REF. 00
	✠ CLOVER DISPLAY LIMITED			

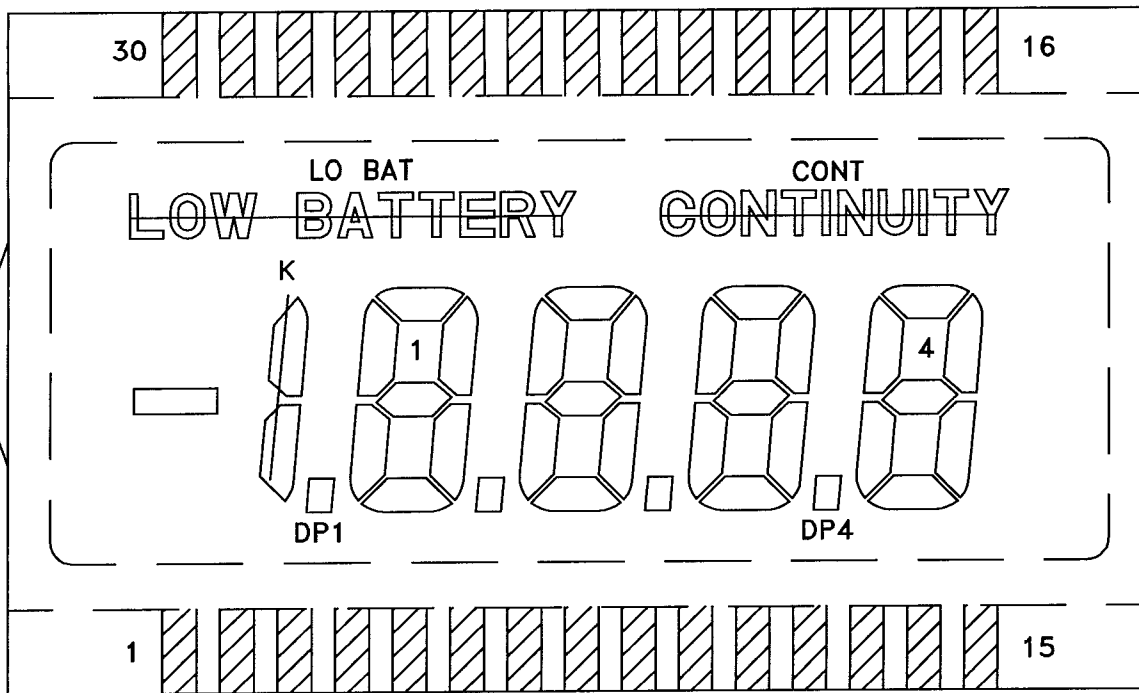

PIN	COM1	COM2	COM3
1	1F	1E	DP1
2	1A	1G	1D
3	1B	1C	K
4	2F	2E	DP2
5	2A	2G	2D
6	2B	2C	□
7	3F	3E	DP3
8	3A	3G	3D
9	3B	3C	LO BAT
10	4F	4E	DP4
11	4A	4G	4D
12	4B	4C	CONT
13	COM1	/	/
14	/	COM2	/
15	/	/	COM3
16~30	/	/	/

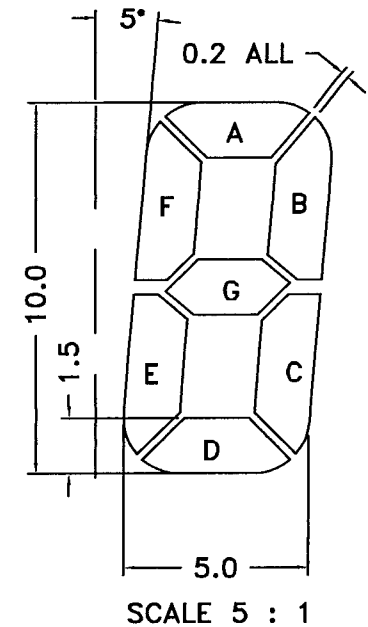


TN TYPE

MODEL NO.	S5066A	S5066B	S5066C	S5066D	S5066E	S5066F	S5066G	S5066H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN

DISPLAY TYPE	POSITIVE / NEGATIVE
	REFLECTIVE / TRANFLECTIVE / TRANSMISSIVE
OPERATION VOLTAGE	3.0 V
DRIVING METHOD	1/3 DUTY , 1/3 BIAS

REV.	REVISION RECORD	DATE	STANDARD		APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	11-APR-16	CUSTOMER REF.			APPROVED BY	Y.WEN	<i>See</i>
			SHEET 2 OF 3	PROJECTION	DATE	11Apr,16	(1 Apr 16)	11 Apr 2016
			SCALE 3 : 1	S5066	DRAWN BY :	X.ZH.LIU	UNIT IN mm	OUR REF. 00
					CLOVER DISPLAY LIMITED			

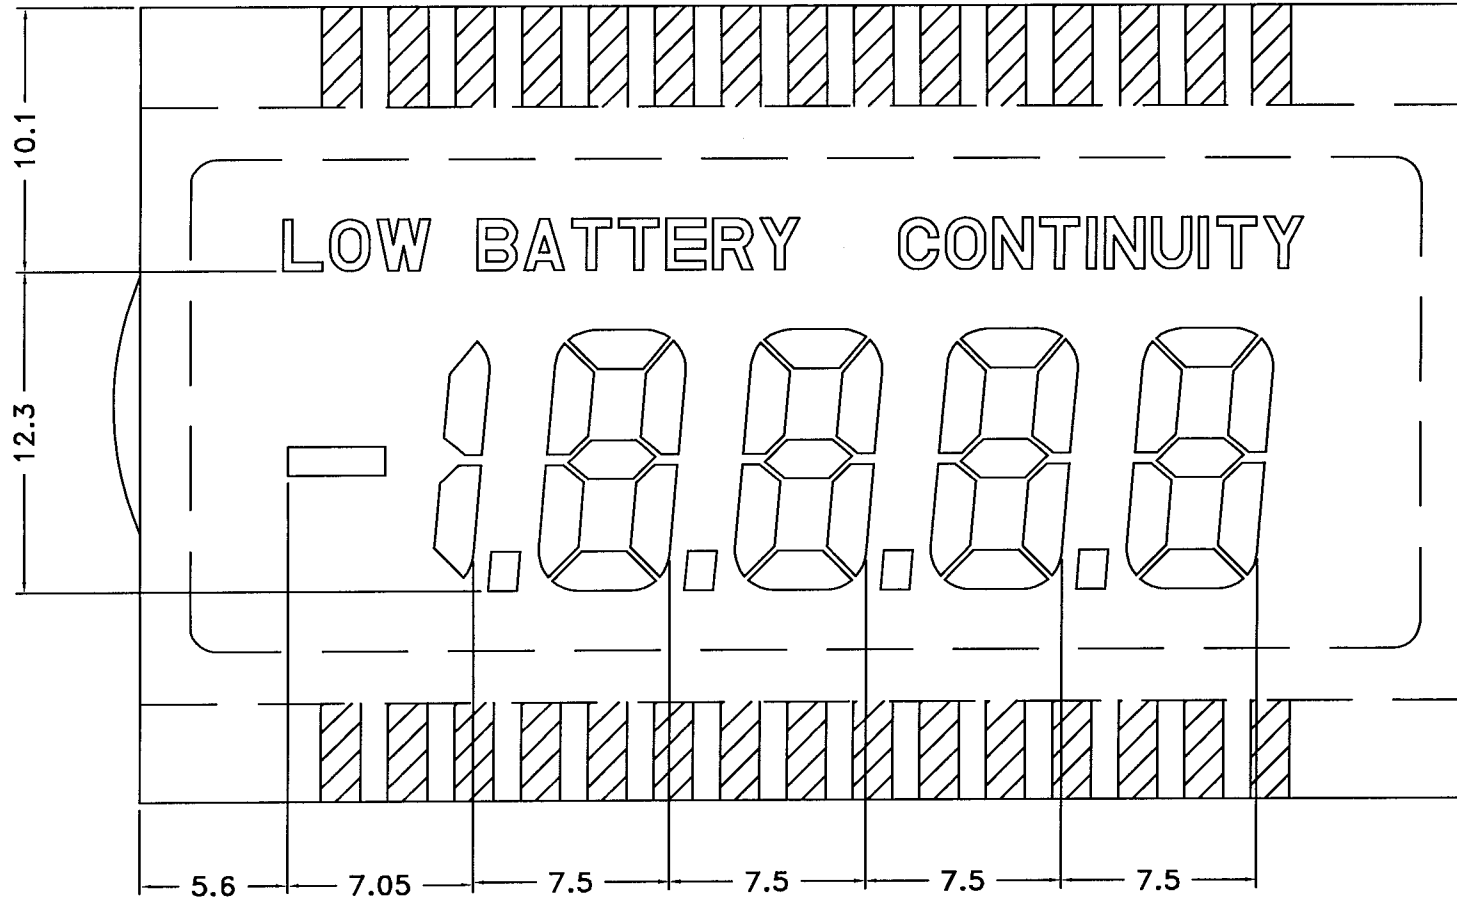

REV.	REVISION RECORD	DATE	STANDARD	 PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	11-APR-16	CUSTOMER REF.		APPROVED BY	Y.WEN	<i>Jes</i>	<i>姜作良</i>
			SHEET 3 OF 3	DATE	11Apr,16	11 Apr 16	11 Apr 2016	
			SCALE 7 : 2	DRAWN BY :	X.ZH.LIU	UNIT IN mm	OUR REF. 00	
				S5066	CLOVER DISPLAY LIMITED			