


MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	20-DEC-03
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 3 : 1		


PROJECTION

S5096

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY			
DATE			
DRAWN BY : M.F.YU		UNIT IN mm	OUR REF. 00
✠ CLOVER DISPLAY LIMITED			

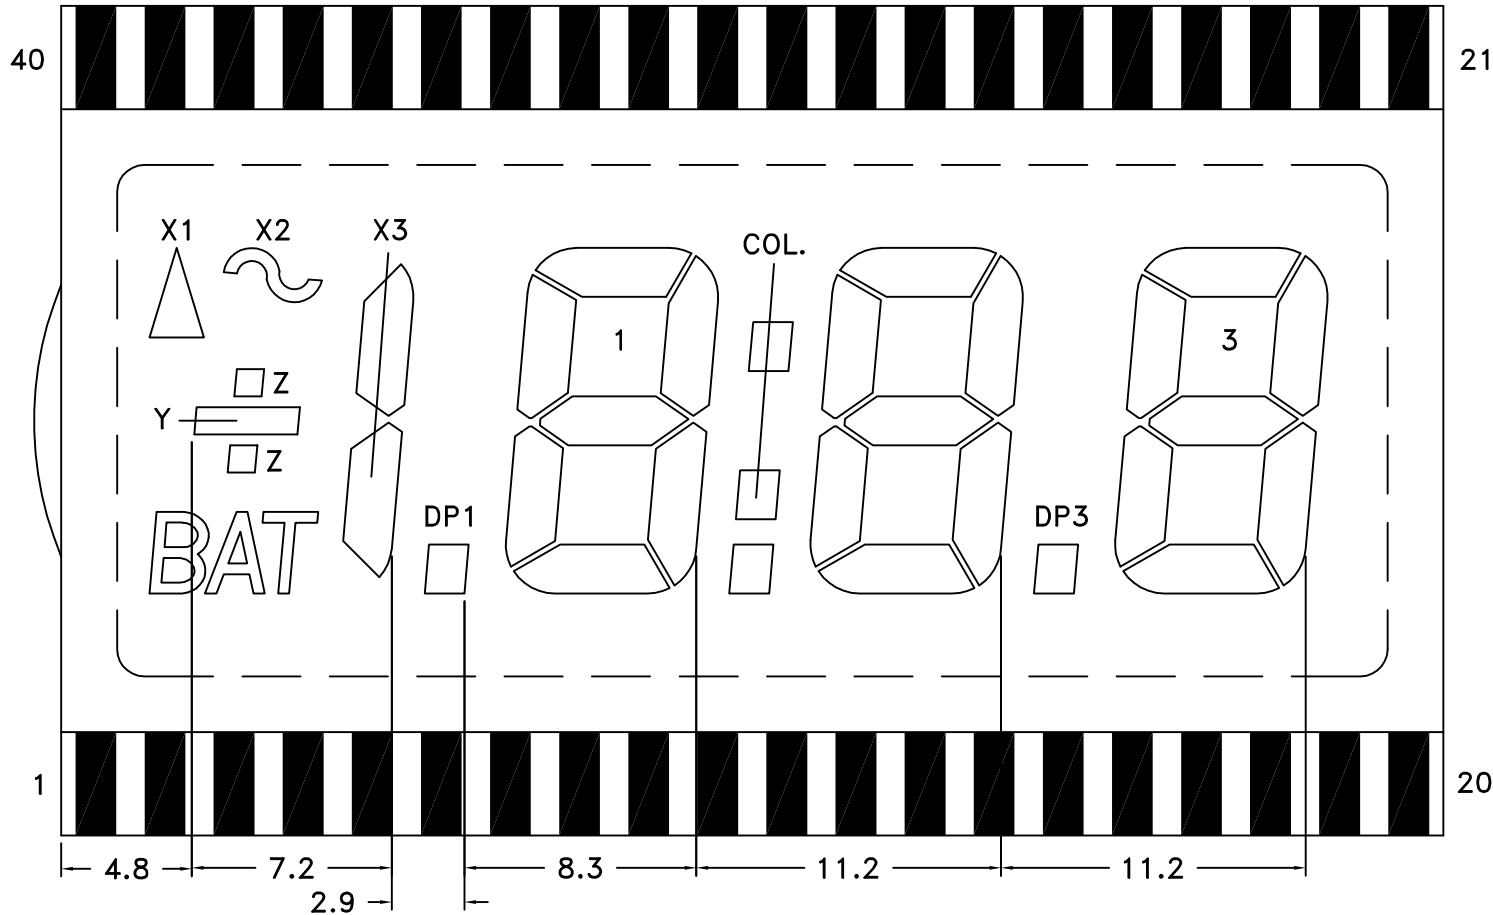

PIN	COM	PIN	COM
1	COM	21	3A
2	Y	22	3F
3	X3	23	3G
4	/	24	2B
5	/	25	2A
6	/	26	2F
7	/	27	2G
8	DP1	28	COL.
9	1E	29	1B
10	1D	30	1A
11	1C	31	1F
12	DP2	32	1G
13	2E	33	/
14	2D	34	/
15	2C	35	/
16	DP3	36	/
17	3E	37	X2
18	3D	38	X1
19	3C	39	Z
20	3B	40	BAT

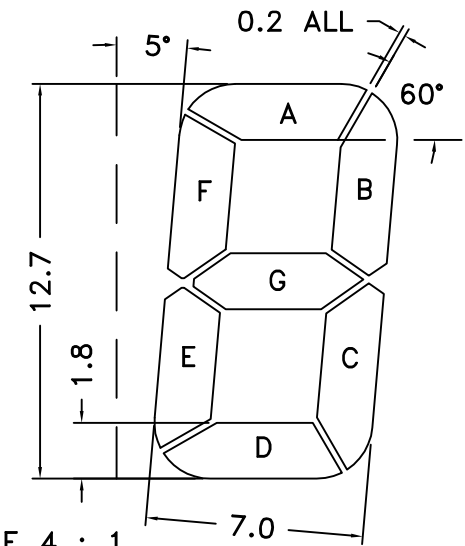

SCALE 4 : 1

TN TYPE

MODEL NO.	S5096A	S5096B	S5096C	S5096D	S5096E	S5096F	S5096G	S5096H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE 0°C ~ 50°C STORAGE -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C	0°C ~ 50°C -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C	0°C ~ 50°C -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C	0°C ~ 50°C -10°C ~ 60°C	-20°C ~ 70°C -30°C ~ 80°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN

DISPLAY TYPE	POSITIVE / NEGATIVE REFLECTIVE / TRANFLECTIVE / TRANSMISSIVE
OPERATION VOLTAGE	3.0 V
DRIVING METHOD	STATIC

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	20-DEC-03	CUSTOMER REF.	APPROVED BY			
			SHEET 2 OF 2	DATE			
			SCALE 7 : 2	DRAWN BY : M.F.YU	UNIT IN mm	OUR REF. 00	
				PROJECTION S5096			
				CLOVER DISPLAY LIMITED			