


MECHANICAL TOL. ± 0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	31-OCT-08
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE 5 : 2		


PROJECTION

S5126

APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
APPROVED BY			
DATE			
DRAWN BY : X.T.CHUI		UNIT IN mm	OUR REF. 00
✠ CLOVER DISPLAY LIMITED			

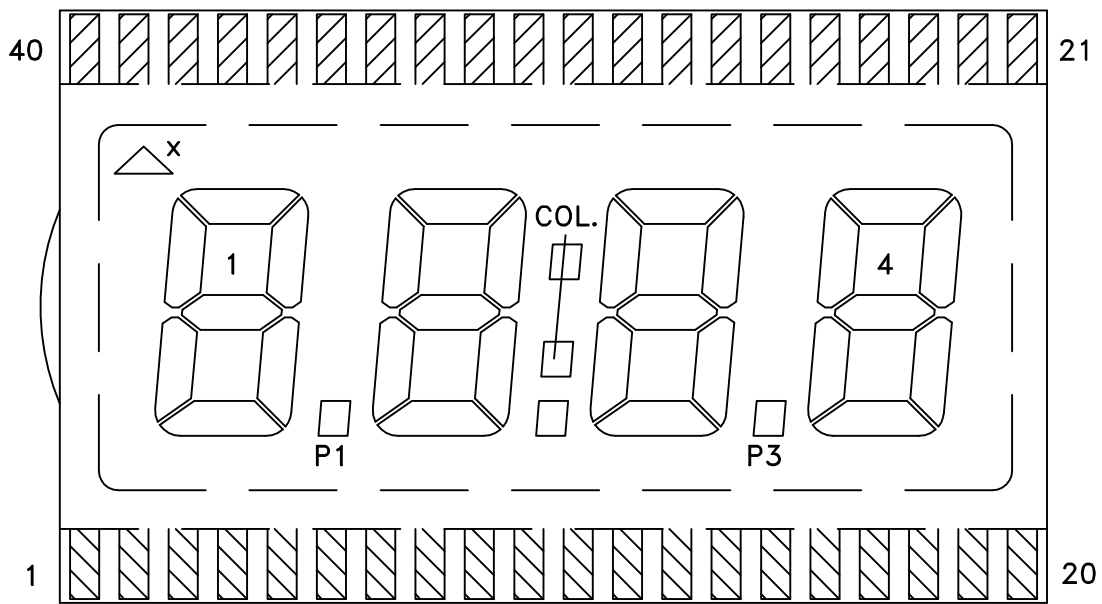

PIN	COM	PIN	COM
1	COM	21	4A
2	/	22	4F
3	/	23	4G
4	/	24	3B
5	1E	25	3A
6	1D	26	3F
7	1C	27	3G
8	P1	28	COL.
9	2E	29	2B
10	2D	30	2A
11	2C	31	2F
12	P2	32	2G
13	3E	33	/
14	3D	34	1B
15	3C	35	1A
16	P3	36	1F
17	4E	37	1G
18	4D	38	X
19	4C	39	/
20	4B	40	COM

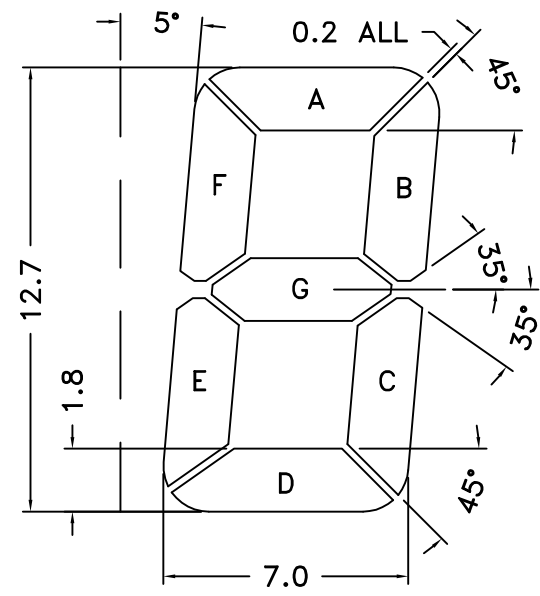

SCALE 9 : 2

TN TYPE

MODEL NO.	S5126A	S5126B	S5126C	S5126D	S5126E	S5126F	S5126G	S5126H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-30°C ~ 80°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN
DISPLAY TYPE	POSITIVE / NEGATIVE REFLECTIVE / TRANSFLECTIVE / TRANSMISSIVE							

OPERATION VOLTAGE	3.0 V
DRIVING METHOD	STATIC

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	31-OCT-08	CUSTOMER REF.	APPROVED BY			
				DATE			
			SHEET 2 OF 2	DRAWN BY : X.T.CHUI		UNIT IN mm	OUR REF. 00
			SCALE 5 : 2	PROJECTION S5126			
CLOVER DISPLAY LIMITED							