
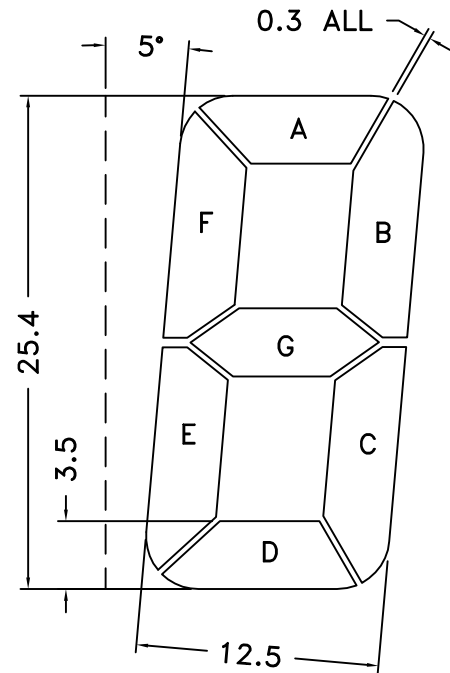


MECHANICAL TOL. ± 0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	03-MAR-09
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE N.T.S		

 PROJECTION S5977	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
	APPROVED BY	Y.WEN		
	DATE	03Mar,09		
	DRAWN BY :	M.F.YU	UNIT IN mm	OUR REF. 00
CLOVER DISPLAY LIMITED				

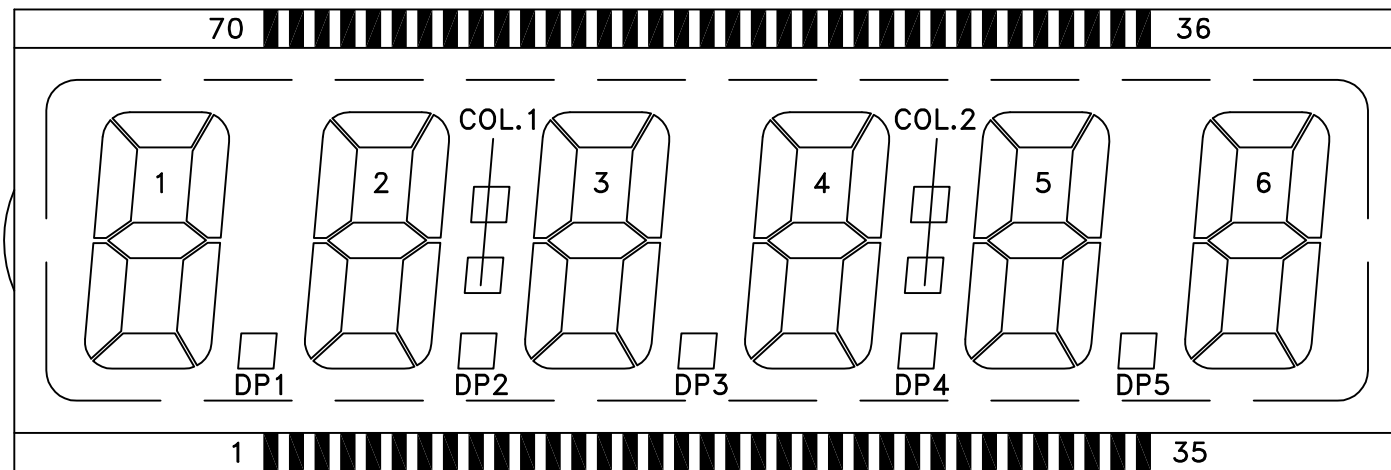

SCALE 5 : 2

PIN	COM	PIN	COM	PIN	COM	PIN	COM	PIN	COM	PIN	COM	PIN	COM	PIN	COM
1	COM	10	3E	19	4E	28	5D	37	6A	46	4B	55	3B	64	2F
2	1E	11	3D	20	4D	29	/	38	6F	47	/	56	/	65	2G
3	1D	12	/	21	/	30	/	39	6G	48	/	57	/	66	1B
4	1C	13	/	22	/	31	5C	40	5B	49	/	58	3A	67	1A
5	DP1	14	/	23	/	32	DP5	41	5A	50	4A	59	3F	68	1F
6	2E	15	/	24	4C	33	6E	42	5F	51	4F	60	3G	69	1G
7	2D	16	3C	25	/	34	6D	43	5G	52	4G	61	COL.1	70	COM
8	2C	17	/	26	DP4	35	6C	44	COL.2	53	/	62	2B		
9	DP2	18	DP3	27	5E	36	6B	45	/	54	/	63	2A		

TN TYPE

MODEL NO.	S5977A	S5977B	S5977C	S5977D	S5977E	S5977F	S5977G	S5977H
VIEWING DIRECTION	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C	-20°C ~ 70°C	0°C ~ 50°C
	STORAGE	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C	-30°C ~ 80°C	-10°C ~ 60°C
CONNECTOR	ZEBRA	ZEBRA	PIN	PIN	ZEBRA	ZEBRA	PIN	PIN
DISPLAY TYPE	POSITIVE / NEGATIVE							
	REFLECTIVE / TRANSFLECTIVE / TRANSMISSIVE							
OPERATION VOLTAGE	5.0 V							
DRIVING METHOD	STATIC							

REV.	REVISION RECORD	DATE	STANDARD	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	03-MAR-09	CUSTOMER REF.	APPROVED BY	Y.WEN		
				DATE	03Mar,09		
			SHEET 2 OF 2	DRAWN BY :	M.F.YU	UNIT IN mm	OUR REF. 00
			SCALE N.T.S	 PROJECTION			
				 S5977 CLOVER DISPLAY LIMITED			