



MECHANICAL TOL. ±0.2 UNLESS SPECIFIED

APPROVAL	COUNTER DRAWING	CUSTOMER REF.	REV.	DATE
COMPANY NAME	STANDARD		00	12-DEC-00
APPROVED BY		SHEET 1 OF 2		
DATE		SCALE	NTS	

 PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
	APPROVED BY			
	DATE			
DRAWN BY : JOE		UNIT IN mm	OUR REF. 00	
S5978		CLOVER DISPLAY LIMITED		

MODEL NO.		S5978A	S5978B	S5978C	S5978D	S5978E	S5978F	S5978G	S5978H
VIEWING DIRECTION		6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	6 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK	12 O'CLOCK
TEMPERATURE RANGE	OPERATE	0°C ~ 50°C	-30°C ~ 80°C	0°C ~ 50°C	-30°C ~ 80°C	0°C ~ 50°C	-30°C ~ 80°C	0°C ~ 50°C	-30°C ~ 80°C
	STORAGE	-10°C ~ 60°C	-40°C ~ 85°C	-10°C ~ 60°C	-40°C ~ 85°C	-10°C ~ 60°C	-40°C ~ 85°C	-10°C ~ 60°C	-40°C ~ 85°C
CONNECTOR		Zebra	Zebra	Pin	Pin	Zebra	Zebra	Pin	Pin

OPERATION VOLTAGE	5.0 V
DRIVING METHOD	STATIC
DISPLAY TYPE	TN / REFLECTIVE / POSITIVE

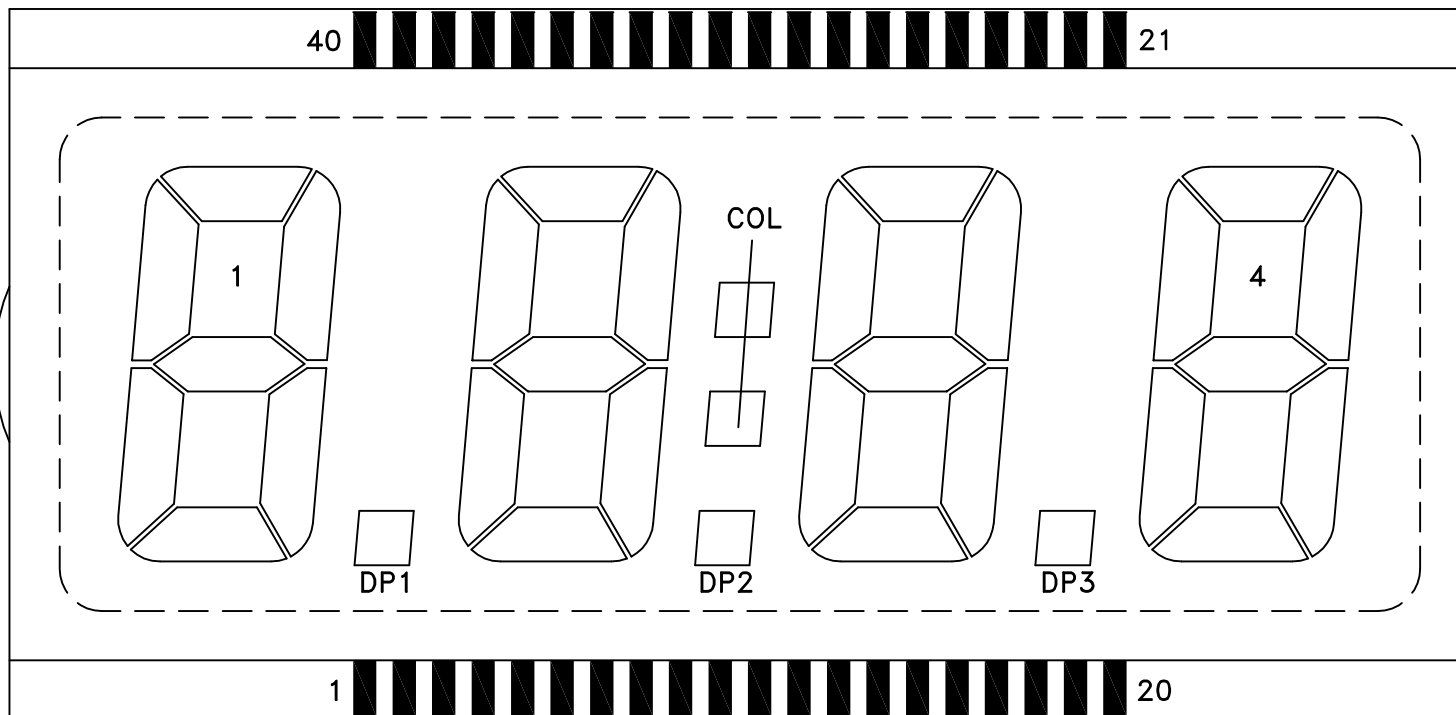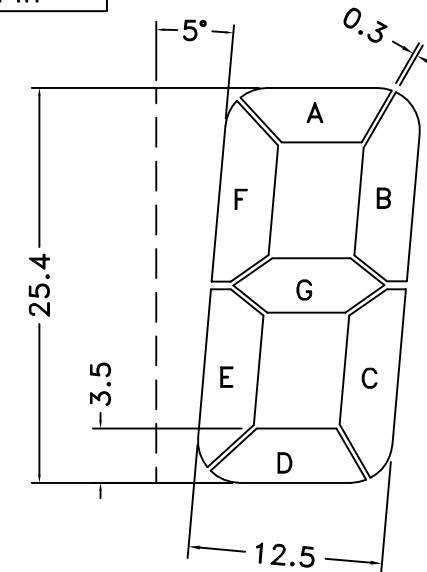

PIN	COM	PIN	COM	PIN	COM	PIN	COM
1	COM	11	2C	21	4A	31	2F
2	/	12	DP2	22	4F	32	2G
3	/	13	3E	23	4G	33	/
4	/	14	3D	24	3B	34	1B
5	1E	15	3C	25	3A	35	1A
6	1D	16	DP3	26	3F	36	1F
7	1C	17	4E	27	3G	37	1G
8	DP1	18	4D	28	COL	38	/
9	2E	19	4C	29	2B	39	/
10	2D	20	4B	30	2A	40	/

REV.	REVISION RECORD	DATE	STANDARD	 PROJECTION	APPROVAL	DRAFTING	CUSTOMER-SERVICE	ENGINEERING
00	1st ISSUE	12-DEC-00	CUSTOMER REF.		APPROVED BY			
				DATE				
			SHEET 2 OF 2	DRAWN BY : JOE		UNIT IN mm	OUR REF. 00	
			SCALE NTS	S5978	CLOVER DISPLAY LIMITED			